




ASSEMBLY AND MAINTENANCE

The *Spot Free Water Filter* is specifically designed for reversible flow, which allows it to be used in either direction.

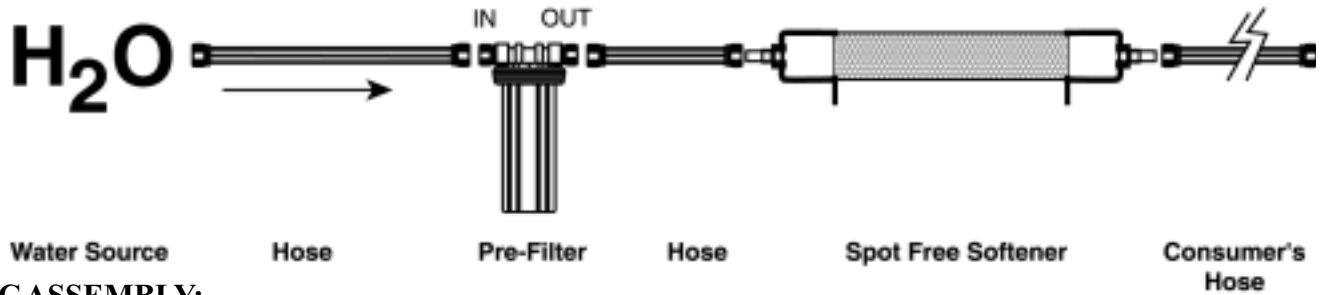

BASIC ASSEMBLY:

***NOTE:** Flush out the water source faucet by running at full for 2 minutes prior to connection. This will help eliminate any build-up in the line and increase the life of your *Spot Free Pre-Filter*.

- 1.) Open Clear Pre-Filter and remove plastic wrap from charcoal filter. Re-insert charcoal filter into Clear Pre-Filter.
- 2.) Attach one end of the long hose to your water source and the other end to the “in” port of the clear pre-filter.
- 3.) Attach the shorter hose to the “out” port of the clear pre-filter and then to the *Spot free Water Filter*.
- 4.) Attach your hose to the other end of the *Spot Free Water Filter*.
- 5.) Turn water source on for approximately 2 minutes to flush the *Spot Free Water System*.
- 6.) The *Spot Free Water System* is now ready for use.

MAINTENANCE:

Spot Free 1000 - Recharge after approximately 1000* gallons of use.

Spot Free 2500 - Recharge after approximately 2500* gallons of use.

Spot Free 5000 - Recharge after approximately 5000* gallons of use.

For maximum effectiveness, your *Spot Free Water Filter* should be checked periodically using the Water Hardness Test Strip provided. If necessary, recharge your *Spot Free Water Filter*. This process can be done in approximately 10-15 minutes. It is recommended that you use a form of water-softening salt, such as the sample provided. Additional salt may be purchased through the manufacturer or from your local distributor.

*** NOTE:** If the source of water is excessive in hardness or iron levels, more frequent recharges are required for optimum filtration. Do not use this product where water is microbiologically unsafe or with water of unknown quality.

RECHARGING INSTRUCTIONS:

- 1.) Unscrew cap of pre-filter housing and remove filter cartridge.
- 2.) Replace with full recharge cartridge. If you do not have a recharge cartridge fill housing with water-softening salt. Replace cap onto housing.
- 3.) Turn water on at one-quarter pressure to allow water to run through pre-filter and dissolve water-softening salt. Once the softening salts are dissolved turn off the water. Repeat this process once for the 2500 unit and twice for the 5000 unit.
- 4.) Unscrew the pre-filter cap and replace the filter cartridge back into the pre-filter housing. Remove empty recharge cartridge and save for next use.
- 5.) The *Spot Free Water Filter* is now ready for use.

SPECIFICATIONS:

MODEL:	SF1000	SF2500	SF5000
DIMENSIONS:	26" x 5"	27" x 6"	37" x 6"
WEIGHT:	15 lbs.	23 lbs.	33 lbs.
MAX. WATER PRESSURE:	psi 100	psi 100	psi 100
FILTER:	VARIOUS PREMIUM ION RESINS		

MAX. WATER TEMPERATURE: 110 degrees or 43 Celsius. MIN. WATER TEMPERATURE: 40 degrees or 05 Celsius